

Serial No. 09/888,696

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**  
**BEFORE THE BOARD OF PATENT APPEALS AND INTERFERENCES**

In re Application of  
STEVE A. NIXON

Serial No: 09/888,696

Filing Date: June 25, 2001

Title: AMBIENT TEMPERATURE CURING  
COATING COMPOSITION

Mail Stop Appeal Brief – Patents  
Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

Docket No: ACO 2799 US

Examiner: M. G. Moore

Group Art Unit: 1712

**CERTIFICATE OF MAILING**

I hereby certify that this correspondence is being deposited with the United States Postal Service as First-Class mail in an envelope addressed to: Mail Stop Appeal Brief – Patents, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450

on September 15, 2004

*Lynn Brush*  
Lynn Brush

**REPLY BRIEF**

This is in reply to the Examiner's Answer ("Answer") mailed July 15, 2004. It is respectfully submitted that the record shows the rejection is not sustainable and it is requested that it be reversed.

**The Examiner's Contention Is Contrary To The Art And Not Supported**

The Examiner unsuccessfully attempts to manipulate the Yamaki reference into disclosing a coating composition with the presently claimed invention's "more than 70% by weight solids." Claim 1. In this attempt, she contends that "one having ordinary skill in the art would have had the skill to remove any solvent that is not necessary to the composition in Yamaki et al." Answer, pages 4-5. No support is offered by the Examiner for this statement and it is not supported by what is known in the art or by the record of the present application. If anything, the opposite is true.

**It's Contrary To The Art**

It is known, instead, that increasing a composition's solids content (the result intended by the Examiner's suggested removal of solvent) results in a "virtually linear" increase of viscosity. D. Stoye and W. Freitag, "Resins For Coatings", p. 33, section 4.1.1, 2<sup>nd</sup> paragraph, last sentence, and p. 285, Fig. 8.5 ("Stoye/Freitag"). (Pages 28, 29, 33, 34

and 285 of the reference enclosed in response to this assertion in the Examiner's Answer.)

It is known that it is undesirable to increase the viscosity of the coating composition. See, for example, the present specification, p.2, 1<sup>st</sup> full sentence, and Stoye/Freitag, p. 33, section 4.1.1, 2<sup>nd</sup> paragraph, last sentence. As a result, special methods are used when preparing a composition with increased solids content as discussed in the Appeal Brief, p. 4, last paragraph, and p. 5, 1<sup>st</sup> paragraph, and in Stoye/Freitag, p. 34, section 4.1.1, 1<sup>st</sup> paragraph. Accordingly, the knowledge in the art teaches away from the Examiner's contention that the skilled artisan would simply remove solvent to increase the solids content of Yamaki's composition.

### **It's Not Supported**

Further, the record of the present application does not support the Examiner's contention. Yamaki does not lead the skilled artisan to use something other than a solvent system or a solids content anywhere near the more than 70% in the claimed invention, as shown by 1-3 below:

1. Yamaki discloses only solvent-containing systems for preparing components A, B and D of its composition  
(Appeal Brief, p. 5, 3<sup>rd</sup> full paragraph, – p. 6, 3<sup>rd</sup> full paragraph; Response Under 1.116, p. 5, paragraphs 5-7; Second Response Under 1.116, p. 3, 1<sup>st</sup> full paragraph, - p. 4, 2<sup>nd</sup> full paragraph);
2. it discloses only solids contents of 36%, 40% and 40%, respectively, for components A, B and D  
(Appeal Brief, p. 5, 3<sup>rd</sup> full paragraph, – p. 6, 3<sup>rd</sup> full paragraph; Response Under 1.116, p. 5, paragraphs 5-7; Second Response Under 1.116, p. 3, 1<sup>st</sup> full paragraph, - p. 4, 2<sup>nd</sup> full paragraph); and
3. it discloses only a solids content of 20% in the final composition with components A, B, C and D  
(Appeal Brief, p. 4, 2<sup>nd</sup> full paragraph, and p. 6, 3<sup>rd</sup> full paragraph; Response Under 1.116, p. 6, 2<sup>nd</sup> full paragraph).

The disclosure in the Yamaki patent is limited to what it fairly teaches or suggests, which is not the same as its being limited to its examples.

Also of record is that the present specification discloses a special method to achieve a solids content of more than 70% and that Yamamori, 2002/0011177 A1, also discloses a special method to achieve a high solids content, while there is no teaching of any such special method in Yamaki (Appeal Brief, p. 3, 1st full paragraph, – p. 5, 2<sup>nd</sup> full paragraph; Response Under 1.116, p. 5, paragraphs 4-5; Second Response Under 1.116, p. 2, 4<sup>th</sup> full paragraph, – p. 3, 1st paragraph).

### **Appellant Did Traverse Examiner's Position**

Contrary to the Examiner's assertion in the Answer, Appellant did traverse her position that "the amount of solvent in the silica dispersed component (A) is not enough to result in a final solids content outside the claimed range." Answer p. 4. The Examiner expressed this position in the 1<sup>st</sup> Advisory Action mailed October 22, 2003, and it was traversed. (Appeal Brief, p. 3, 1st full paragraph, and p. 5, second-to-last paragraph; Second Response Under 1.116, p. 3, 2<sup>nd</sup> full paragraph, and p. 4, 2<sup>nd</sup> full paragraph).

### **Conclusion**

A prima facie case of obviousness has not been established because the three criteria have not been met: Yamaki does not suggest it would be desirable to modify its composition to contain more than 70% by weight solids, as claimed; there is no reasonable expectation, based on Yamaki's disclosure, that its composition could be made to contain more than 70% by weight solids; and Yamaki does not teach or suggest a composition containing more than 70% by weight solids. Additionally, Yamaki does not enable a composition containing more than 70% by weight solids based on its complete lack of disclosure thereof.

Respectfully submitted,



Lainie E. Parker  
Attorney for Applicant(s)  
Reg. No. 36,123

Akzo Nobel Inc.  
Intellectual Property Department  
7 Livingstone Avenue  
Dobbs Ferry, NY 10522-3408  
Tel No.: (914) 674-5466

Enclosure: D. Stoye and W. Freitag, "Resins For Coatings", pages 28, 29, 33, 34 and 285

# Resins for Coatings

Chemistry, Properties and Applications

Edited by  
Dieter Stoye and Werner Freitag

With contributions from

G. Beuschel, J. Bieleman, P. Denkinger, W. Freitag, H. Gempeler,  
G. Horn, A. Kruse, F. Lohse, C. Machate, M. Müller, B. Neffgen, J. Ott,  
W. Scherzer, W. Schneider, A. Sickert, D. Stoye, W. Wieczorrek

With 47 Figures and 48 Tables



Hanser Publishers, Munich Vienna New York

Hanser/Gardner Publications, Inc., Cincinnati



[References p. 31]

transition from the  
ure, associated with  
is temperature, the

other product prop-  
index, the density,  
of the temperature-  
s transition temper-  
perature is differen-

the polarity of the  
re of copolymeriza-  
mass, the degree of

perature of the film

(3.21)

ie respective homo-  
mer.

does the addition of  
glass transition tem-  
must be improved by

en 0 and 80 °C. The  
hardness, blocking  
of the resin, on the  
ther properties [27].

er [28-30]. To sep-  
the polymer flows,  
individual molecular  
m other molecules.  
s to dissolve it, and

polymer chain in the  
undle or may adopt  
ile is, the higher the  
ling the lower it is.  
t solvents. Depend-  
s exert a strong in-  
and the age of the  
e viscosity of their

### 3.5 Solubility and Viscosity

29

In accordance with Einstein, the relative viscosity of a solution is related to the proportion by volume  $\rho$  of the dissolved or dispersed phase in the solution, in accordance with the equation 3.22 [31]

$$\eta_{rel} = 2.5 \rho + 1 \quad (3.22)$$

The relative viscosity is the quotient of the solution viscosity and the inherent viscosity of the solvent, and is therefore easy to determine

$$\eta_{rel} = \frac{\eta_L}{\eta_0} \quad (3.23)$$

The specific viscosity is

$$\eta_{sp} = \eta_{rel} - 1 = (\eta_L - \eta_0) \eta_0 \quad (3.24)$$

Einstein's viscosity law (Equation 3.25) gives a relationship between the specific viscosity, reduced to the concentration in the solution, which is termed the viscosity number, intrinsic viscosity or Staudinger Index, and the average density of tangling of the polymer in the solution [32, 33].

$$\frac{\eta_{sp}}{c} = [\eta] = \frac{2.5}{\bar{\rho}_{cqu}} \quad (3.25)$$

For solutions of infinite dilution, i.e. where  $c \rightarrow 0$ , the result is the intrinsic viscosity  $[\eta]$ , which in accordance with the general viscosity equation for macromolecular solutions is related to the molecular mass (see also Equation 3.16):

$$[\eta] = k_{[\eta]} \cdot M^a \quad (3.26)$$

### 3.6 Polarity and Spatial Occupation by Substituents

The polarity of the polymers is essentially determined by the structure of the polymer chains and the nature of the substituents on the polymer chain. As a result of increased interaction between the molecules, the polarity limits the molecular mobility of the polymer chains, and therefore determines the rigidity, the cohesion of the polymer chains, and thus in turn, important properties such as glass transition temperature, crystallization tendency, solubility, hardness, scratch resistance, elasticity and adhesion. If groups of the same charge sign occur along the polymer chain, they repel one another and the molecule is stretched and made rigid. Groups which occupy a relatively large space also reduce the mobility of the molecules for steric reasons and therefore have the same effect. This is why, for example, polyvinyl chloride, with an accumulation of polar chlorine atoms, and polystyrene, with space-occupying phenyl groups, are harder and more rigid than normal polyolefins. On the other hand, however, it must be borne in mind that space-occupying groups increase the free volume of the polymer molecule and thus bring about a reduction in the glass transition temperature, which runs counter to the increase in the glass transition temperature brought about by the reduction of molecular mobility.

## 4 Processing States

Peter Denkinger

The surfaces of the majority of articles are provided with coatings after if not during their production [1–11]. The function of the coating is to protect the article against the effects of weathering or wear and, in addition, to give it the desired overall appearance in terms, for instance, of colour, texture or gloss. The coatings are in most cases polymer-based and are applied in thin films of usually 0.001–0.1 mm in thickness; exceptions to this are plastisols and organosols. The polymers must adhere well to the substrate to be coated and must form a pore-free film. By the process of film formation, which is termed drying, the polymers enter the solid state.

The major role is played by film formation from the liquid or pastelike state, for instance from solutions, dispersions or melts. Of particular significance is the production of films from powders, which takes place by way of the melted state. Coating from the gaseous state, such as metallization and vapour deposition, is also known.

During the procedure in which the coating materials are applied from the various processing states, drying or curing may take place as a consequence of physical and/or chemical processes. If the film is formed from a melt or by evaporation of the solvent or dispersion medium without reaction between the components of the coating material, one speaks of physical drying. With chemical drying, on the other hand, the formation of the film is accompanied by chemical reactions which lead to crosslinked macromolecules. This crosslinking procedure may involve the autocrosslinking of low molecular weight oligomers or macromolecules, or external crosslinking between low molecular weight substances such as crosslinking agents or crosslinking resins with polymers.

### 4.1 Film Formation from Solution

#### 4.1.1 Polymers in Organic Solvents

In the case of dissolved resins and thermoplastic binders, film formation occurs by evaporation of the organic solvent [12]. Drying can be accelerated by increasing the temperature. In physically drying systems, the binder can be redissolved or strongly swelled by addition of solvents. Chemically drying systems can still be swollen by solvents after the drying process, but can in principle no longer be dissolved.

Films produced from solutions, in comparison with films from dispersions, are devoid of additives such as emulsifiers and organic and/or inorganic salts and for this reason exhibit better resistance to water.

The disadvantages with polymer solutions are the relatively high costs for workplace safety and environmental measures, the danger of fire and explosion, the costs of solvent recovery or solvent incineration and the toxicity of the solvents. In addition to this, the viscosity increase of high-molecular polymers as the solids content increases is virtually linear (see Figure 8.5), so that only solutions of relatively low solids content can still be processed.

-204  
inger, Heidelberg 1969.  
ethoden der organischen

pringer, Frankfurt 1953,

w York 1971  
berg 1977

\* York 1975

Glassy State New York

Correlation with Chemi-

ork 1975  
gart 1977, p. 173

-(1911) 591–592

1942) 1712

hold, New York 1959,

of Chemical Technolo-

ok, 3rd ed. Wiley, New

In relatively recent times, low-solvent (high-solids) systems have been developed which contain from 20 to 30 per cent by mass of organic solvents and which can be processed using the conventional equipment [13, 14]. In order to obtain a workable viscosity at such high solids contents, the molecular mass of the polymers is reduced. However, the molecular mass of the physically drying binders must not reach too low a level, since otherwise the coatings may become too soft and thereby tacky or susceptible to dirt, and lose their mechanical properties such as hardness and elasticity. In chemically drying systems, the use of relatively large quantities of curing agent is necessary for crosslinking, which may lead to products of increased brittleness. In both cases, a compromise is made between optimizing the technological properties and minimizing the solvent content. Another factor in the formation of films from solution is the differing solvent retention of the various systems.

#### 4.1.2 Polymers in Reactive Solvents

Polymers carrying polymerizable groups are dissolved, for specific applications, in reactive solvents. Following the application of these solutions, polymerization takes place between the polymer and the solvent, with the solvent becoming part of the binder. The polymerization can be initiated by a free-radical mechanism, using free-radical initiators as is the case with unsaturated polyesters dissolved in styrene (see Chapter 6.1), or by UV light or electron beams, as is the case with radiation-curing polyacrylates (see Chapter 8) or acrylicized polyurethanes (see Chapter 7.1) which are dissolved in acrylate monomers. From the standpoint of environmental protection, these systems represent particularly environment-friendly coating products. Care, however, must be taken to ensure that the reactive solvents are of low toxicity and minimal volatility.

#### 4.1.3 Polymers in Water

Polymers of relatively high molecular weight are generally insoluble in water. In order, despite this fact, to bring them homogeneously into the aqueous phase, the polymers must be rendered hydrophilic by the incorporation of relatively high proportions of water-friendly - i.e. usually polar - monomers. Monomers which are suitable in this respect contain, for example, an accumulation of ether groups. The water-solubility of the resulting polymers is still limited, and in most cases the only systems which can be obtained are those which, although giving clear solutions, cannot be regarded as true solutions on the basis of their physical characteristics. In respect of their particle size, they fall between solutions, colloidal solutions and microdispersions. Moreover, the products remain sensitive to water even after drying, and must therefore be crosslinked with a co-reactant in order to give useful coatings.

Another method of bringing polymers homogeneously into the aqueous phase is by introducing ionic charges into the polymers; in other words, by forming polymer salts. These polymer salts can be anionic, cationic or zwitterionic in nature: polymers with carboxyl groups form anions after neutralization with amines, polymers with amino groups form cations after neutralization with acids, whereas zwitterionic polymers carry both acidic and aminic groups (e.g. protein structures). The polymer salts are fundamentally soluble in water, and it depends critically on the molecular mass and the nature of the solvating

#### 4.2 Film Formation

phase as to what c  
In order to improv  
good solvating po  
In the course of d  
tralizing compone  
phase, whereas th  
go further chemica  
Aqueous coating s  
ing methods. A sp  
an anaphoretic or  
ing technique (see  
Disadvantages of i  
ization and the rela  
dictates.

#### 4.2 Film

##### 4.2.1 Aqueous

Aqueous dispersion  
bution in water. Th  
persions; see Chapt  
melts in water (secc  
mass, these dispersi  
cosity depends on t  
pared at low exper  
systems fall away  
removed from the f  
retained water adve  
in relation to organi  
face tension and die  
of aqueous dispersio  
The dispersions ofte  
um but also a range  
loids and low-molec  
and therefore also af  
may not be as resist  
As the dispersion dr  
ticles is restricted as  
with one another [1  
forces which exist b  
stability of the dispe  
compels these partic  
their deformation. Su  
mer-polymer contact  
This is only accompl  
er than the resistance



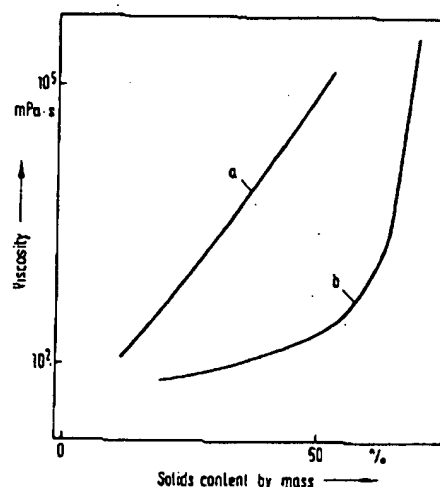


Figure 8.5. Viscosity as a function of solids content (diagrammatic) in polymer solutions (a) and polymer dispersions (b)

Emulsion polymers can be used directly for adhesives, paints and coatings or for the finishing of leather. For these applications it is often necessary to control the average particle size. Technically this can be achieved in a number of ways, which are dealt with in more detail in the literature [4, 100–102, 111–113].

## 8.6 Polymer Groups

Polyvinyl compounds (vinyl polymers, (poly)vinyl resins, polyvinyls) are produced by polymerization of vinyl compounds  $\text{CH}_2=\text{CHR}$  (Sections 8.1–8.3) or by polymer-analogous reaction of other polyvinyl compounds, as is the case, for example, with the preparation of polyvinyl alcohol from polyvinyl acetate (Section 8.6.10).

In the literature, however, not all compounds which possess the atomic grouping  $\text{CH}_2=\text{CH}-$  (IUPAC name: ethenyl) are referred to as vinyl compounds. For instance, for historical reasons compounds of the type  $\text{CH}_2=\text{CHR}$  where  $\text{R}=\text{alkyl}$  are also referred to as  $\alpha$ -olefins (e.g. propene), while those where  $\text{R}=-\text{COOR}$  are called acrylates. The atomic grouping  $\text{CH}_2=\text{CH}-\text{CH}_2-$ , which contains the vinyl grouping, is in turn called the allyl group. The sections which follow will describe vinyl polymers which find their principal application in the paints and coatings industry. These polymers can be divided into the following major groups:

- polyolefins
- halogenated polyolefins
- polyvinyl alcohols, acetals and ethers
- polyvinyl esters
- polyacrylates
- polystyrenes
- polyvinylpyrrolidones
- indene and coumarone resins
- hydrocarbon resins

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**